

Talo recliner chair

15237 The Talo recliner is a comfortable and well-designed recliner chair with castors. The reclining mechanism guarantees a long-term seat comfort.

Support

- The support is made of 2 solid beech sides, connected to each other by means of a solid beech cross beam.
- The side parts are connected to each other by means of a glued mortise and tenon joint.
- The sides are firmly connected to each other by means of a solid beech cross beam and a metal frame.
- The ergonomic design of the armrests makes it easy to stand up or sit down.
- Comfortable rounded armrests of ± 7 cm.
- All edges and corners have been rounded.
- Four design twin castors $\varnothing$ 100 mm with separate brakes.

Seat

- Removable seat, made of a melaminated MDF board of 12 mm.
- The rounded seat in front stimulates a fluent blood circulation.
- Comfortable seat height of 46 cm.
- Upholstered with fire-retardant foam in 2 different density zones to guarantee an excellent seat comfort.
- The upholstery is finished with imitation leather and decorative stitching.

Backrest

- Made of an ergonomically preformed plywood shell of 12 mm.
- Upholstered with fire-retardant foam in 3 different density zones to guarantee an excellent seat comfort.
- The upholstery is finished with imitation leather and decorative stitching.
- Can be continuously adjusted up to 25° by means of a gas spring.
- Thanks to a lever on both sides, the chair can be locked in every position.
- Large and ergonomic push bar made of synthetic material at the back.

Colours


We would like to refer to our extensive colour gamut.
Sample card + samples available on request.



Dimensions

15237 | W 69 x D 78 x H 125 cm

- Seat height: 46 cm
- Seat depth: 49 cm
- Seat width: 53 cm
- Height armrests: 70 cm
- Safe working load: 135 kg

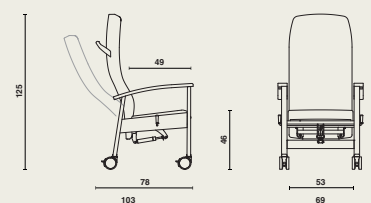

Materials and finishing

- Wood: beech (solid), plywood, MDF.
- Metal: epoxy coating (black).
- Fire-retardant foam.
- Upholstery: see collection.
- Resistant to the common cleaning products.

For further information about used **materials, constructions and maintenance**: consult our materialfiles.

Options

- Lock mechanism for the lever.
- Seat cushion with a top layer of 40 mm viscoelastic foam and a bi-elastic cover.
- Dinner tray attachments.
- Abduction block.
- Adjustable and removable head/neck cushion.
- Backrest with removable headrest.
- Closed upholstered side panels.
- Accessory brackets.
- DIN rail.
- Restraint bracket.
- Lateral headrest.
- Anatomical reduction cushion.
- Beech laminated legs without castors.
- Integrated auxiliary wheels on the back legs.
- Dinner tray support on backrest.

