


HAELVOET A COLLECTION

- Stamskin Top (M2)
- Silverguard (M2)
- Vescom Furka Plus (Crib5)
- Vescom Leone Plus (Crib5)
- Vescom Creek (Crib5)
- Vescom Arrow (Crib5)
- Vescom Dalma (Crib5)
- Vescom Jemo (Crib5)
- Boltaflex (M1)
- Diamonds (M2)
- Skai Parotega (M1)
- Skai Palma (M1)
- Purfect (Crib5)
- Ginkgo (M1)
- Valencia (M2)
- Harlow (M2)
- Maglia (M2)
- Hitch (M2)


- Agua Linetta (Crib5)
- Agua Tones (Crib5)
- Agua Nova (Crib5)



F4340-10120




F4340-5029



F4340-20287



F4340-07479



F4340-20283




F4340-20299



F4340-20281



F4340-20280



F4340-07478



F4340-10295



F4340-20294




F4340-20289



F4340-20288



F4340-20300



F4340-20237




F4340-20284



F4340-20253




F4340-20241




F4340-20282




F4340-20296




F4340-20285




F4340-20279



F4340-20286




F4340-20129




F4340-20161



F4340-07432



F4340-07445



F4340-00002

Stamskin

Top

■ Technical properties - Propiedades técnicas

Standards - Normas

Description - Descripción	Multi-layer composite - Composite multi capas	
Base cloth - Soporte	Polyamide-jersey - Poliamida-jersey	
Width - Ancho	Approx. 140 cm - 55.1 inches	
Weight - Peso	780 g/m ² - 23 oz/yd ²	EN ISO 2286-2
Thickness - Espesor	1.0 - 1.2 mm • 1000-1200 μ	ISO 5084

■ Physical properties - Propiedades físicas

Elongation under load 125 N/5 cm Alargamiento bajo carga 125 N/5 cm	> 35% / > 55% (warp/weft) - (urdimbres/trama)	EN ISO 1421
Tensile strength Resistencia a la tracción	> 440 N / 5 cm / > 280 N / 5 cm (warp/weft) - (urdimbres/trama)	EN ISO 1421
Tear strength Resistencia al desgarro	> 25 N / > 15 N > 120 000 cycles (warp/weft) - (urdimbres/trama)	EN ISO 13937/1
Abrasion resistance (norms, cycles) Resistencia a la abrasión (normas, ciclos)	> 120 000	EN ISO 5470-2 Martindale
Flexing resistance (no damage, cycles) Resistencia a los pliegues (ciclos sin daños)	400 000	EN ISO 7854
Light stability Estabilidad a la luz	GS=4 at 700h - GS=4 a 700h	ASTMG154: UVA340
Mold resistance - Resistencia al moho	Degree 0, excellent - Grado 0, excelente	EN ISO 846-A
Extreme working temperatures Temperaturas extremas de uso	-20°C / +70°C - -4°F / 158°F	

■ Flame retardancy - Reacción al fuego

Switzerland - Suiza	5.3	SN 198898 - VKF/AEAI
Italy - Italia	Class 2 - Clase 2	UNI 9177/87
Germany - Alemania	Class K1	DIN 53438 / T2
France - Francia	M2 F4	NFP 92.507 NFP 16-101-102
United States - Estados Unidos	Pass - Conforme Class 1	CAL TB 117-2013 NFPA 260
Australia - Australia	Pass - Conforme Group 2	AS / NZS 1530-3 AS/NZS 3837
Test cigarette / match - Test cigarrillo / cerilla	No fire - Sin ignición	EN 1021.1 - 1021.2
Marine test - Test marino	Pass - Conforme	IMO MSC.307 (88) (2010 FTP Code) Annex 1 part 8
Aeronautical test - Test aeronáutico	Pass - Conforme	FAR/JAR 25-853/855

■ Management systems - Sistemas de gestión

Quality - Calidad	ISO 9001
Environment - Medio ambiente	ISO 14001

■ Certifications, labels, garantíes - Certificaciones, labels, garantías



**5 years
guarantee**

**Phthalate
free**

**Swiss
made**

**Smart Coating
Technology**




With **S+** Serge Ferrari goes further than the Standards.
(consult us for further information)


Quoted technical characteristics are average values with a +/- 5% tolerance. Our products are subject to improvements resulting from technical developments and we reserve the right to modify their characteristics at any time. The purchaser of our products is responsible for checking the above data.

Las características técnicas indicadas son valores medios con una tolerancia de +/- 5%. Nuestros productos están sujetos a evolución según los progresos técnicos, reservándonos el derecho de modificar las características en todo momento. Es responsabilidad del comprador de nuestros productos comprobar la validez de los datos anteriores.


S i l v e r t e x




5468
HUNTER




5444
JUNGLE



6343
MIZZLE




3375
WHALE




3352
DEEPSEA




7251
GOJI



9243
BRICK



5039
SMOG




2318
WINDY



9002
CARBON




9001
BLACK




2105
CAMEL



2103
SKYLIGHT



2102
CORAL




2101
ALUMINIUM



2100
TEAL



2099
LOTUS



2098
ROSE



2097
ORCHID




2096
TOMATO



2095
GRENADINE




2094
PETROL



2093
SQUASH




2092
AVOCADO



2090
ICE CREAM



2089
WHITE



3001
TURQUOISE




3066
BALTIC




3067
DELFT




3068
JET



3007
SAPPHIRE



5063
FOREST



5010
BOTTLE



5020
BASIL



5008
PISTACHIO

S i l v e r t e x



5019
CELERY



5009
SAGE



7001
AUBERGINE



2016
RASPBERRY




6004
RUBIN




2064
WINE



1014
UMBER



2011
RED



2012
SUNKIST



6061
MANDARIN



2003
COBRE




6065
SAFRAN



6062
MELON




0013
ORANGE




0073
LUGGAGE



4004
ICE




1077
CREAM




1051
SISAL




1078
CHAMPAGNE



1010
BEIGE



0001
MACADAMIA




0002
SANDSTONE




0009
TAUPE



4012
SHIITAKE



4024
METEOR



0005
MOCCA



4001
PLATA




4011
STERLING



4010
TITANIUM



4002
STORM



4003
GRAPHITE

S i l v e r t e x

Composition: Top: 100% PVC
Backing: 100% PES

Colour Range: 66

Weight: 683 gr/m² +/- 65

Thickness: 1.15 mm +/- 0.16

Roll width: +/- 137 cm

Roll length: +/- 30 lm

TECHNICAL ASPECTS

Abrasion:	EN ISO 12947	300.000 cycles Martindale
Light Fastness:	ISO 105 B02	Min 7/8 blue scale
Burning Behaviour:	EN 1021	1 - 2
	BS 5852	0 - 1
	NFP 92.503:	M2
	FMVSS 302	

Finishes + treatment: PERMABLOK +
Resistant to blood
Resistant to urine
Resistant to Fungi
Outdoor



Virucidal activity: ISO 18184: 2019
ISO 21720: 2019

Coated fabrics treated with PERMABLOK are proven to reduce the presence of Corona virus by more than 90 % within one hour of the contact and reduce Coronavirus activity by 99.9 % within 24 hours of exposure on the surface.

Sustainability:

ISO 14001: Environmental Management ecoSense
Carbon Neutral CARBON NEUTRAL
REACH REACH
RoHS RoHS

CLEANING INSTRUCTIONS

Clean with a lye of warm water and mild natural soap, using a micro-fiber cloth.

Please do not use products containing alcohol, solvents, chloride, chemical cleaning agents or detergents.

furka plus

7064.01 - 7064.44




leone plus

7054.01 - 7054.26



creek


7053.01 - 7053.22




7053.01




7053.02




7053.03



7053.04



7053.05




7053.06




7053.07



7053.08



7053.09



7053.10




7053.11




7053.12



7053.13



7053.14



7053.15




7053.16




7053.17




7053.18




7053.19



7053.20




7053.21



7053.22

arrow


7055.01 - 7055.23




7055.01




7055.02



7055.03




7055.04



7055.05




7055.06



7055.07



7055.08



7055.09



7055.10




7055.11



7055.12



7055.13




7055.14



7055.15




7055.16




7055.17




7055.18




7055.19




7055.20



7055.21



7055.22



7055.23

dalma

7024.01 - 7024.22



7024.01



7024.02



7024.03



7024.04



7024.05



7024.06



7024.07



7024.08



7024.09



7024.10




7024.11




7024.12



7024.13




7024.14



7024.15



7024.16



7024.17



7024.18



7024.19



7024.20



7024.21



7024.22

jemo

7044.01 - 7044.21



7044.01




7044.02



7044.03



7044.04



7044.05



7044.06



7044.07




7044.08



7044.09



7044.10



7044.11



7044.12



7044.13



7044.14



7044.15




7044.16



7044.17



7044.18



7044.19



7044.20



7044.21

BOLTAFLEX COLOURWAYS

Indoor




TOMATO
454 285



PERSIMMON
454 303




NASTURTIUM
454 293




MARIGOLD
454 301




SAFFRON SILK
454 294




LEMON PEEL
454 308



WHEAT
454 327



NEW BURGUNDY
454 287




WINE
454 307



CANDY APPLE
454 298




FIRE RED
454 311




LOX
454 348




INDIAN RED
454 289




MELBA
454 365




PORT
454 351




DEEP CLAY
454 288



RUSSET
454 297




BURNT ORANGE
454 299




BRANDY
454 336




APRICOT
454 345




MELON
454 361



CHOCOLATE
454 318




ALLSPICE
454 304




OAK BROWN
454 363




SADDLE TAN
454 309




CAMEL
454 305



RUM SHERBET
454 354



CEYLON IVORY
454 334



HUNTER GREEN
454 296




EMERALD
454 352




EMPIRE GREEN
454 314




LIME
454 326




CITRUS
454 122



OCEAN GREY
454 332



MOONGLOW
454 310




SPRUCE
454 325



JADE
454 317




TURK
454 295



LIGHT TEAL
454 300




CHINA GREEN
454 319



QUARTZ
454 330



MINT JULEP
454 313



BLUEJAY
454 284




MARINA
454 283



BRIGHT BLUE
454 121




PHOENICIAN
454 350




SKY
454 347




LIGHT BLUE
454 123



CERULEAN
454 349




NAVY
454 312




ROYAL BLUE
454 292




BLUEBERRY
454 286




COLONIAL BLUE
454 346




COAL
454 328




CADET
454 353



FJORD
454 344




ESPRESSO
454 333




GRAPE
454 302



PURPLE IRIS
454 291




LILAC
454 368




MAUVE
454 367




ROSEWOOD
454 908




NATURAL
454 329




BLACK
454 290




SLATE
454 316



GREY
454 358



LIGHT GREY
454 331



GLACIER
454 366




WHITE
454 306




SNOW WHITE
454 315

DIAMONDS

Indoor - Outdoor

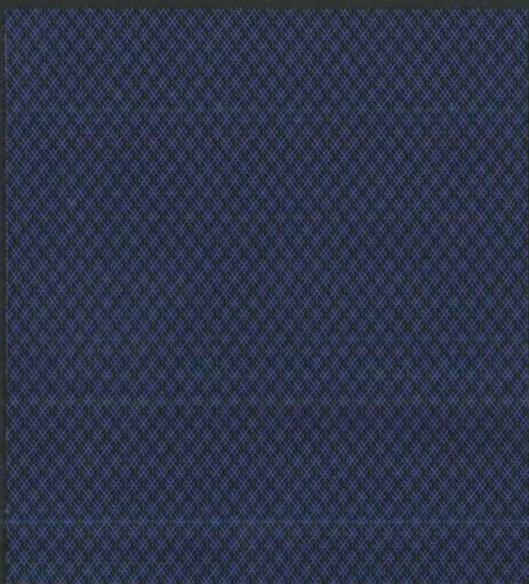

6618 DIAMONDS INDIGO



6620
TAPIOCA



6606
TAUPE




6617
GRAPEY



6614
MULBERRY




6623
VINTAGE




6621
TONIC



6600
POLAR




6622
MERCURY




6610
CARBON




6608
REGATTA



6603
METEOR



6602
SUNSET




6607
LAVA



6615
SNOW




6613
EXPRESSO




6616
IVORY



6601
SAGE



6604
HONEY



6619
OTONO



6624
PEPPER



6611 DIAMONDS OLIVE


skai® Parotega NF




0098-18
IMO FTPC Part 8




weiss F6461652



hellbeige F6461632




kiesel F6461653




sattel F6461733



perle F6461662



birke F6461661



cappuccino F6461762

New



marone F6461655




cinder F6461763

New



smoke F6461660



olivbraun F6461704




schoko F6461656




light rosé F6461764

New



marsala F6461765

New




kirsche F6461665 *



feuer F6461707



cashmere F6461737



mango F6461666



sherry F6461654



lachs F6461702

skai® Parotega NF



fango F6461658




mais F6461706



limone F6461657




olivgrün F6461705



fuchsia F6461735



lila F6461736



amethyst F6461664



teal F6461766

New



gletscher F6461708



aqua F6461709



mint F6461767

New




rain forest F6461768

New



ashgrey F6461769



stone blue F6461770

New




royal F6461710




nightblue F6461729*




silbergrau F6461730




schiefergrau F6461731




anthrazit F6461663



schwarz F6461659



weiss F6411143




perle F6411008



birke F6411152



smoke F6411153



inka F6411145




kenia F6411146




limone F6411195



olivgrün F6411196



torf F6411197




lachs F6411144



rubin F6411010 *



amethyst F6411155



atoll F6411005 *




baltic F6411006




rauchblau F6411198*



kirsche F6411154 *



lichtgrau F6411199



platin F6411012 *



anthrazit F6411160



schwarz F6411011



Public Area



Hospitality



Residential



Healthcare

Materialzusammensetzung:

ca. 85% PVC-Compound
ca. 15% BW-Gestrick
Gewicht: 780 +/- 50 g/m²
Dicke: 1,3 +/- 0,2 mm
Rollenbreite: 137 cm
Rollenlänge: 30m

Material composition:

approx. 85% PVC-compound
approx. 15% CO-knitted fabric
weight: 780 +/- 50 g/m²
thickness: 1.3 +/- 0.2 mm
roll width: 137 cm
roll length: 30m

Composición del material:

aprox. 85% compuesto de PVC
aprox. 15% soporte textil de punto de algodón
Peso: 780 +/- 50 g/m²
Espesor: 1,3 +/- 0,2 mm
Ancho de rollo: 137 cm
Largo de rollo: 30m



langelig
long-lasting
larga vida útil



reißfest
tear resistant
resistente al desgarro



abriebfest
abrasion resistant
resistencia a la abrasión
DIN EN ISO 5470-2:
Parotega NF:
> 75 000 Martindale
Palma NF:
> 50 000 Martindale



schwer entflammbar
flame protection
resistencia al fuego
DIN 4102-1 (Part 1, B1),
DIN EN 13501-1 B, s3, d0
DIN 66084 P-a,
NF M1, AM 18,
BS5852 IS-0+1+5,
DIN EN 1021-1+2,
DIN 4102-1 (B2),
MVSS302, FAR 25.853,
ÖNORM B3825 schwer
brennbar (B1),
ÖNORM A 3800-1 Q1,
UNI 9175/87 (1.1M)



pflegeleicht
easy to clean
fácil mantenimiento



lichtecht
lightfast
resistente a la luz
DIN EN ISO 105-B02,
Stufe 7 / level 7 / nivel 7



desinfektionsmittelbeständig
disinfectant resistant
resistente a los
desinfectantes



blut- und urinbeständig
blood- and urine resistant
resistente a la sangre
y a la orina



0098-18
IMO FTPC Part 8

Anwendung / Verarbeitung

Geeignet für viele Arten von Bepolsterungen und Bespannungen in der Polsterindustrie. Besonders geeignet für den Einsatz im trendorientierten Wohn- und Objektbereich, in öffentlichen Gebäuden und Einrichtungen. Problemlose Verarbeitung nach den üblichen Verfahren (Nähen, Heften, Kleben, Nageln). Keine Lösemittelkleber verwenden!

Sonstige Hinweise

Für dauerhafte Freude an ihrem skai® Material bitte regelmäßig reinigen. Verschmutzungen durch Öle, Fette und Tinte müssen umgehend entfernt werden. Benutzen sie hierzu eine warme, milde Seifenlauge und ein Mikrofasertuch oder eine weiche Handbürste. Bitte keine Lösemittel, Chloride, Poliermittel, chem. Reinigungsmittel oder Wachspoliermittel einsetzen. Bitte beachten sie, dass Anfärbungen durch Jeans oder andere Textilien von jeglicher Herstellergarantie ausgenommen sind.

Besondere Hinweise

Unsere anwendungstechnischen Empfehlungen in Wort und Schrift, die wir aufgrund unserer Erfahrung entsprechend dem aktuellen Kenntnisstand weitergeben, sind unverbindlich und begründen kein Rechtsverhältnis und keine Nebenverpflichtungen aus dem Kaufvertrag. Sie entbinden den Käufer nicht davon, unsere Produkte für den vorgesehenen Verwendungszweck in eigener Verantwortung selbst zu prüfen. Im Übrigen gelten unsere allgemeinen Geschäftsbedingungen. Hiermit verlieren alle früheren, anderslautenden Regelungen ihre Gültigkeit.

Application / Processing

Suitable for many kinds of upholsterys and coverings in the upholstery industry. Especially suitable for the use in the modern residential and contract area, in public buildings and institutions. Problem-free processing in the usual procedures (sewing, tacking, sticking, nailing). Do not use solvent-based adhesives!

Other instructions

For durable joy with your skai® material, please clean regularly. Clean with warm water or a mild soap sud and a micro-fibre cloth or a soft hand brush. Stain caused by oil, fat or ink must be removed immediately. Please do not use solvents, chloride, abrasives, chemical cleaning agents or wax polishes. Please note that colorings caused by jeans or other textiles are excluded from any manufacturer's guarantee.

Special notes

Our written and spoken technical recommendations, which we provide based on our experience in accordance with the current state of knowledge, are nonbinding and do not constitute a legal relationship and are not additional obligations from the purchase agreement. They do not release the purchaser from checking our products for the intended use under his own responsibility. Otherwise, our general terms and conditions are in effect. All earlier provisions to the contrary hereby become invalid.

Aplicaciones / Manipulación

Apto para múltiples tipos de tapizado y revestimientos para la industria del mueble tapizado. Especialmente diseñado para el empleo en espacios modernos tanto públicos como privados, en edificios públicos e instituciones. Aplicación sencilla por medio de procedimientos habituales (cosido, hilvanado, pegado, clavado). No usar pegamento disolvente.

Otros consejos

Para disfrutar de su material skai® por muchos años, límpielo regularmente. Las manchas de aceites, grasas y tintas deben eliminarse de inmediato. Utilice para ello una solución jabonosa suave y templada y un paño de microfibra, o bien un cepillo de mano de cerdas blandas. No utilice disolventes, cloruros, pulimentos, limpiadores químicos ni abrillantadores de cera. Recuerde que la garantía del fabricante excluye cualquier transferencia de color causada por tejanos y otros materiales textiles.

Advertencias especiales

Nuestras recomendaciones técnicas de aplicación, verbales o escritas, que facilitemos sobre la base de nuestra experiencia y de los conocimientos técnicos más actuales, no son vinculantes en ningún caso ni constituyen un compromiso contractual o responsabilidades añadidas al contrato de compraventa. No eximen al comprador de verificar personalmente nuestros productos para el uso previsto y bajo su responsabilidad. En todo lo demás, se aplicarán nuestras condiciones generales. lo que supone la nulidad de cualquier otro acuerdo previo.




* nach den gesetzlichen Bestimmungen prescribed by law de conformidad con las disposiciones legales




DIN EN ISO 9001
DIN EN ISO 14000
DIN EN ISO 50001


Purfect




53593 • CONCRETE




82417 • Vanilla Brilliance




84176 • Bisquit



85352 • Cocos



87241 • Fudge



46508 • Peanut



Easy to clean



Antibacterial



Made in Europe




Waterproof



CRIB 5




Available from stock



74007 • Kiwi




76236 • Olive



36519 • Mustard




44184 • Henna



45633 • Ginger



24784 • Cranberry




65072 • Velvet Plum




65307 • Mystic Purple




67403 • Aubergine




61602 • Ice Blue




72133 • Pepper Mint




63174 • Vintage Blue




65066 • Florance




67382 • Babylon




68746 • Majestic Blue




00800 • Snow White



22427 • Peach




93086 • Ivory



53593 • Concrete



47124 • Cappuccino



48013 • Cocoa




57841 • Cold Lava



58290 • Charcoal




68523 • Iron



00110 • Black

Antibacteriële en schimmelwerende behandeling
Anti-bacterial and anti-fungal treatment

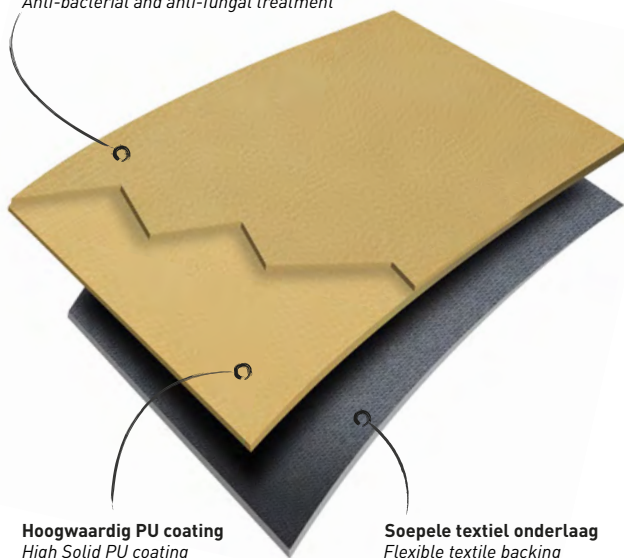

Hoogwaardig PU coating
High Solid PU coating

Soepele textiel onderlaag
Flexible textile backing

EEN UITSTEKENDE PRESTERENDE EN EENVOUDIG TE REINIGEN POLYURETHAAN **A HIGH PERFORMING AND EASY CLEANABLE POLYURETHANE**

Purfect voldoet aan de strengste eisen inzake brandweerstand en is uitermate geschikt voor ruimten waar een perfecte hygiëne van essentieel belang is. Het materiaal is vrij van PVC en ftalaten, waterdicht en voldoet aan de Oeko-Tex en Reach norm.

Purfect meets the strictest requirements for fire resistance and is ideal for areas where perfect hygiene is essential. The coating is free of PVC and phthalates, waterproof and meets the Oeko-Tex and REACH standard.

TECHNISCHE EIGENSCHAPPEN / TECHNICAL PROPERTIES

Samenstelling / Composition	100% Polyurethaan / 100% Polyurethane
Onderlaag / Backing	Katoen / Cotton
Gewicht / Weight	595 g/m ² ± 30 g/m ²
Breedte / Width	140 cm
Rollengte / Roll length	30 lm
Dikte / Thickness	1.00 mm ± 0,10 mm

		<i>Normen/ standards</i>
Trekweerstand / Tensile strength	> 30 daN / 5 cm > 22 daN / 5 cm	ISO 1421
Scheurweerstand / Tear strength	> 2.2 daN > 2.0daN	ISO 4674-01
Wrijvingsweerstand / Abrasion resistance	> 500.000	EN ISO 5470-2 Martindale
Naadweerstand / Seam resistance	> 16 daN / 5cm > 16 daN / 5cm	ISO 13936-1
Uitrekking bij belasting 30N/5cm / Elongation under 30N/5cm	> 11% - 18%	ISO 1421
Hechtingsweerstand / Coating to fabric adhesion	> 3 daN / 5 cm	ISO 2411
Kleurvastheid / Colour light fastness	> 6	EN ISO 105 B02
Wrijftechtheid veslic Rub fastness veslic (behandeld met 70% ethanol) (70% ethanol treatment)	Grade 4/5	ISO 11640
Kleurvastheid bij transpiratie / Colour fastness to perspiration	Grade 4	ISO 11641
Hydrolysis / Hydrolyse test (10 weeks)	Geslaagd / Pass	
Weerstand tegen bloed & urine / Surface restistance against blood and urine	Geslaagd / Pass	EN 12720
Oeko-tex	100	Class 1
Brandveiligheid / Flame retardancy	BS 5852 EN 1021 DIN 4102-1B2 IMO 2010 FTP code	Crib 5 1 & 2 B2 Annex 1 - Part 8
Kwaliteit / Quality		ISO 9001
Milieumanagement / Environmental management		ISO 14001

AD² Textiles

LOODSTRAAT 34
2718 RW ZOETERMEER

E: INFO@AD2TEXTILES.COM
T: +31 (0)85 487 3030




WWW.AD2TEXTILES.COM



Groseille 013 32 026


WILD BERRIES LES BAIES SAUVAGES / WILDBEEREN




Quetsche 013 32 007




Tomate 013 32 044




Nuit 013 32 011




Begonia 013 32 046




Myrtille 013 32 045



Morgon 013 32 016




Pivoine 013 32 025



Lilas 013 32 008

VEGETABLE PATCHES

LES POTAGERS / GEMÜSEGARTEN



Souris 013 32 004



Dune 013 32 023



Vert 013 32 006




Mastic 013 32 013




Amande 013 32 020



Seigle 013 32 027




Menthe 013 32 042



Taupe 013 32 043

REFRESHING FROSTS


LES GIVRÉS DÉSALTÉRANTS / KÜHLER DURSTLÖSCHER




Blanc 013 32 019




Glacier 013 32 059




Aigue Marine 013 32 012



Pierre 013 32 050




Lavande 013 32 009



Petrole 013 32 060

TANGY CITRUS


LES ACIDULÉS / ZITRUSFRÜCHTE




Granny 013 32 052



Mirabelle 013 32 021




Endive 013 32 032




Turquoise 013 32 047

CARAMEL TOFFEE


LES CAMELS TOFFEE / KARAMELL-TOFFEE




Capuccino 013 32 038



Châtaigne 013 32 003



Chocolat 013 32 001



Terre 013 32 048




Tomette 013 32 014



Café 013 32 049



Citrouille 013 32 015



Anthracite 013 32 002

USE ► UPHOLSTERED SEATS
UTILISATION ► REVÊTEMENT DE SIÈGES
VERWENDUNG ► POLSTERMÖBEL

Composition Composition / Materialzusammensetzung	PVC 85 % Cotton 15 %
Weight Poids / Gewicht	830 g +/- 40 g/m ²
Width Laize / Breite	138 / 140 cm
Roll length Longueur des pièces / Rollenlänge	≈ 30 ml
Thickness Épaisseur / Materialstärke	1,3 mm +/- 0,1 mm



Fire proof norm
Classement feu
Brandschutznorm
M1 (NFP 92503)
AM 18 (NFD 60-013)
BS 5852 crib 5
B2 (DIN 4102)
EN 1021.1-2
Cs3d0 (EN 13501-1)
IMO A652
CATB 117 E
CATB 133
NY/NJ-Port Authority
UFAC Fabric class 1
FAR 25853 App F Part 1



Abrasion resistance (ISO 5470-2)
Abrasion Martindale
Scheuertouren
150 000 cycles (12 KPa)



Colour fastness to artificial light
Tenue à la lumière
Lichtechtheit
≥ 6



Phtalates free
Sans Phtalates
Phtalate frei

Technical data sheet is available upon request
Fiche technique disponible sur simple demande
Datenblatt verfügbar auf Anfrage



182 Route de Paris
95420 Nucourt - France
Tel. : +33 (0)1 30 27 28 00
Fax : +33 (0)1 34 67 49 89
Email : griffine@griffine.com
www.cotting-group.com



Molenstraat 207
8710 Wielsbeke - Belgium
Tel. : +32 (0)56 66 52 75
Fax : +32 (0)56 66 41 30
Email : info@plastibert.be
www.plastibert.be




Efficacy against bacteria (MRSA).
Efficacité contre les bactéries (MRSA).
Wirksamkeit gegen Bakterien (MRSA).



BV 0062 Wheel Mark certification for all products used for seats covering in cruise ships and ferries.

Barre à Roue BV 0062 pour les produits destinés au revêtement de sièges dans les navires de transport de personnes.

IMO Zertifikat für alle Produkte für den Einsatz von Sitzpolstern auf Fähren und Kreuzfahrtschiffen.



Clean regularly with a pH neutral soap and a soft brush. Always rinse with clear water. Do not use strong detergents, solvent cleaners, polish, wax, patent chemicals or other products not recommended by Cotting. Some stains like

ball pen, coffee, wine, eosin and also jeans, should be cleaned immediately to avoid any permanent absorption into the vinyl. Be careful : we cannot be held responsible for transfer problems generated by dyes of poor quality. Cotting waives all responsibility for problems arisen out of ignoring the cleaning instructions.

Pour un entretien efficace, nettoyer régulièrement avec un savon au pH neutre et une brosse douce. Dans tous les cas rincer à l'eau claire. Tous détergents, solvants, détachants du commerce ne figurant pas dans la NF collectivité ainsi que tous les produits non conseillés par nos soins sont à proscrire. Nettoyer immédiatement les tâches telles que le stylo, café, vin, éosine ou encore jeans afin d'éviter une migration définitive dans la masse du tissu enduit. Attention: Nous ne pouvons être tenus responsables des problèmes de migrations liés à une teinture de mauvaise qualité. Cotting dégage toute responsabilité quant aux problèmes encourus liés au non respect des consignes d'entretien.

Regelmässige Reinigung mit lauwarmen Wasser, pH neutraler Seife und einer weichen Bürste. Verwenden Sie keine starken, abrasiven oder lösungsmittelhaltige Reinigungsmittel, Polituren, Wachse, chemische Reiniger oder andere, nicht von Cotting empfohlene Produkte. Flecken insbesondere von Kugelschreibern, Kaffee, Wein, Blut oder Jeansstoff sollten sofort gereinigt werden, da sie später unter Umständen nicht mehr rückstandslos entfernt werden könnten. Warnung: Cotting übernimmt keine Haftung dafür, dass Verfärbungen des Kunstleders durch nicht ausreichend farbbeständige Textilien verursacht wurden. Cotting übernimmt keine Haftung für Probleme, die durch die Nichtbeachtung der Pflegehinweise entstanden sind.



Product certified CTB Components by the FCBA technological institute. Mechanical tests, durability, reaction to fire and resistance to food, household, pharmaceutical products, according to NF Office Excellence Certified, NF furniture, professional NF furniture.

Produit certifié CTB Composants par l'institut technologique FCBA. Essais de mécanique, durabilité, réaction au feu et tenue aux produits alimentaires, ménagers, pharmaceutiques, conformément aux référentiels NF Office Excellence Certifiée, NF mobilier professionnel, NF ameublement.

Die Qualität wurde vom französischen Prüf- und Technologieinstitut FCBA gemäß den CTB Komponenten zertifiziert. Entsprechend den Standards für den Einsatz in Büros (NF Office Excellence), Wohneinrichtungen (NF Furniture) und Objekteinrichtungen (Professional NF Furniture) wurden mechanische Tests, Tests auf Haltbarkeit, Brennverhalten und Beständigkeit gegenüber Lebensmitteln, Haushaltsprodukten und Pharmaprodukten durchgeführt.

HARLOW

INDOOR - OUTDOOR



6014 HAR
TOCOS



6013 HAR
BUCKWEED



6033 HAR
KELP (ECO) 



6028 HAR
LUCUMA




6030 HAR
NONI



6029 HAR
MORINGA



6036 HAR
ROOIBOS (ECO) 



6027 HAR
COCONUT




6019 HAR
PERU MACA





6023 HAR
SWEET POTATO



6032 HAR
MATCHA (ECO) 



6034 HAR
SPIRULINA (ECO) 




6012 HAR
BUTTERNUT
SQUASH




6015 HAR
INCA BERRY



6018 HAR
KALE




6037 HAR
HIBISCUS (ECO) 




6002 HAR
GUARANA




6016 HAR
WINTER SQUASH

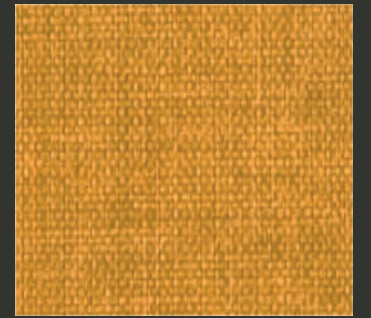



6021 HAR
TURMERIC



6007 HAR
ELDERBERRY



6035 HAR
MAJIK (ECO) 



6001 HAR
GOJI BERRY




6020 HAR
BEE POLLEN



6026 HAR
KHAJUR




6006 HAR
PEA FLOWER




6008 HAR
HUCKLEBERRY




6004 HAR
ALFALFA




6011 HAR
CHIA SEED




6010 HAR
LENTILS




6024 HAR
CACAO BEAN




6031 HAR
NIGELLA




6005 HAR
ACEROLA



6009 HAR
BLACK SOYBEAN



CHARACTERISTICS **INDOOR - OUTDOOR**

Composition:	100% PVC Phthalate Free
Composition ECO colors: 45% sustainable content: BIO-based Plasticizer: 27%, Recycled PET: 18%	
Backing:	100% Polyester
Weight:	730 g/m ²
Roll Width:	min. 137 cm
Roll Length:	+/- 30 m
Abrasion Resistance:	>800.000 cycles (MARTINDALE)
Resistance to oils:	Bending Test DIN 53 359 No change
Blood Resistance Test:	TITV Greiz Passed
Urine Resistance Test:	DIN EN ISO 32100 Passed; No changes, note 5
Cold Crack:	-29 °C 4.05J impact FLTM BN 128 - 01
Heat Ageing: (85 °C, 7 days)	LP - 463LB - 13 - 01 Rating 4 ISO Grey Scale
Light Fastness:	>6 ISO EN 105-B02 (Blue Wool Scale) 4-5 ISO EN 105-B04 (Grey Scale)
Colour Fastness to Sea Water:	DIN EN ISO 105 - E02 4 - 5 minimum
Chlorinated Water:	DIN EN ISO 105 - E03 4 minimum
Artificial Saliva:	DIN 53 160 - 1 Passed, Note 5
Artificial Sweat:	DIN 53 160 - 2 Passed, Note 5
Perspiration:	DIN EN ISO 105 E - 04 Passed, Note 4 - 5
Crocking:	DIN EN ISO 105 - X 12 Dry-Minimum 5.0 AATCC Wet-Minimum 5.0 AATCC
Flame Retardancy*:	EU EN 1021 Part 1 & 2 EU IMO FTP 2010 Code MSC.307 (88) Annex 1 Part 8 EU (MED) Marine Equipment Directive DE DIN 4102 (B2) FR NF P 92-503 (M2) IT UNI 9175 Classe 1.IM AT ÖNORM B 3825, Gruppe 1 AT ÖNORM A 3800 Teil 1 US SAE J369/MVSS 302 US FAR 25.853 (a) Appendix F, Part I, (a), 1, (ii) US FED-STD-191A Test 5903

*This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behaviour of this or any other material under actual fire conditions.

FINISHES AND TREATMENTS



Sanitized antimicrobial hygiene safety

SUSTAINABILITY

OEKO-TEX® Standard 100
REACH / RoHS

SAMPLES AND ENQUIRES

samples: samples@vyvafabrics.nl | orders: info@vyvafabrics.nl

CARE AND CLEANING      

For optimum care and cleaning please read the following instructions and recommendations.

Cleaning instructions

Brush off dirt before it becomes embedded in the vinyl and wipe up spills or clean quickly after a stain appears. The quicker you clean spills and stains, the easier they can be removed.

1. Use a mixture of mild-soap (pH neutral) and water solution (use 1 part soft soap and 10 parts water) to clean vinyl with a white soft cloth or sponge.
 2. Use clean water with a soft cloth to remove excess soap.
 3. Immediately dry vinyl with a white, clean, soft cloth. No soap should remain on the vinyl surface.
 4. Light colors, such as white, require more frequent cleaning.
- Note: If dirt is embedded, you can rub vinyl moderately with a soft brush and soapy solution, then go to step 2 and 3.

Cleaning methods to remove tougher stains

1. The key to keeping vinyl upholstery clean is removing grease, dirt, and residues as quickly as possible after the spill occurs.
2. Do not use abrasive or solvent cleaners, especially cleaners containing concentrated bleach, petroleum distillates or concentrated detergents.
3. For dried stains, vinyl can be cleaned with a soft detergent and water mixture (use 1 part soft powder detergent and 5 parts water). Apply the solution to the stain and wait a minute or two to allow the detergent to act. Then lightly rub the area and rinse thoroughly with clean water. Be sure to completely remove all soap residues. Dry vinyl with a clean, soft cloth.
4. Liquid spills (Coffee, Tea, Liquor, Wine, Sun-tan Lotion, Soft Drinks, etc.) If cleaned before the liquid dries, the spill can easily be removed using a paper towel to absorb the liquid. Clean the area with a moist and clean cloth, then blot dry. In case that the spill is already dried, go to step 3.
5. Thick, moist spills (Ketchup, Mustard, etc.): Lift as much of the spill as possible with a damp cloth, rotating the cloth as you wipe without pressing it into the vinyl surface. Repeat this process as needed, and then blot the vinyl dry. If residue still remains, go to step 3. Flush the area with water and apply a clean cloth, then blot dry.
6. Blood, Urine Stains, Bird Excreta: Sponge with soapy water containing a small amount of household ammonia (1 part pH neutral soap, 5 parts household ammonia, 5 parts water). Clean the excess soap by gentle rubbing with a moist cloth. Any remaining stain should be washed with diluted bleach (10% bleach, 90% water). Dry with a clean cloth.
7. Lipstick, Grease, Oil, Eye shadow, Shoe Polish: Apply a small quantity of household cleaner (like Fantastik® or Formula 409®) mixed with water (1 part cleaner, 1 part water) by means of cloth with gentle rubbing. Use a moist cloth until no cleaner residues remain. Dry with a clean cloth.
8. Ballpoint Ink, Permanent Marker: Ink spots will stain vinyl permanently. Immediate wiping with a 1:1 mixture of Isopropyl alcohol and water will remove much of the stain. Follow up with clean water rinses and towel dry.



ANTIMICROBIAL



OEKO-TEX® STANDARD 100



FLAME RETARDANT



STAIN RESISTANT



WATERPROOF



PHthalate FREE




REACH COMPLIANT



INDOOR OUTDOOR

Valencia

72 inspiring colours

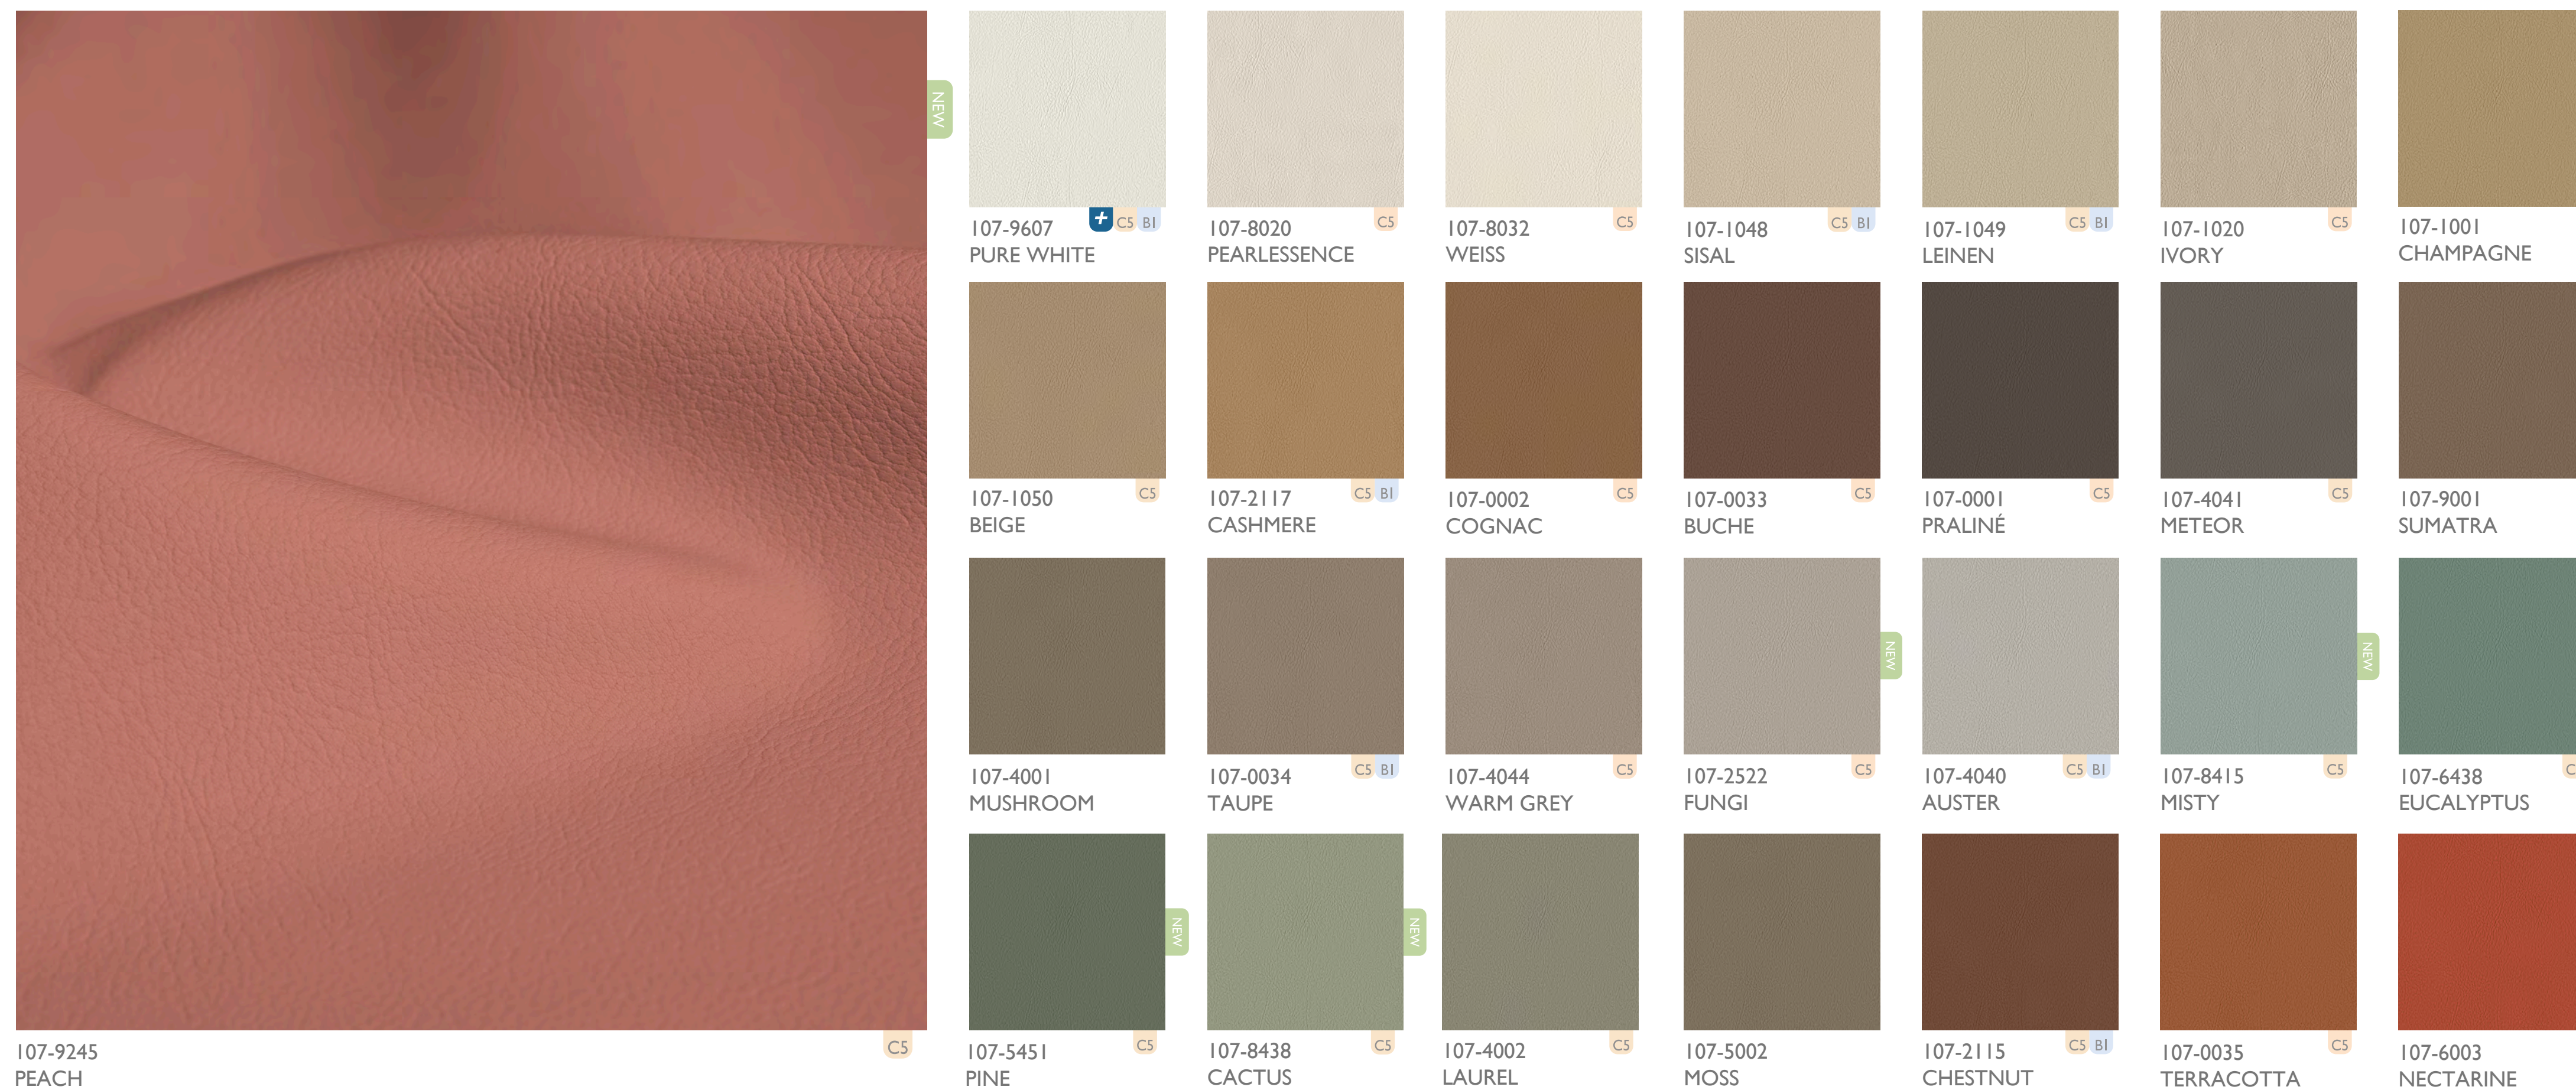













Colour Marked with has **PERMABLOK³ ADVANCED PROTECTION PLUS+** protective finish.

CS Also available in BS 5852 Part 2 CRIB 5 quality
BI Also available in DIN 4102 B1 & NF P 92-503 M1 quality

(article code 238-XXXX)
 (article code VB1-XXXX)

Valencia

72 inspiring colours

 107-6019 ORANGE	 107-6013 MELONE	 107-2116 CAMEL	 107-2111 SQUASH	 107-6012 SAFRAN	 107-2020 SONNE	 107-2110 AVOCADO	 107-5041 APFEL	 107-5001 OLIVE	 107-5069 GRÜN	 107-2119 TEAL
 107-0337 SCUBA	 107-5057 TÜRKIS	 107-5056 JADE	 107-3001 LAVENDEL	 107-3067 DELFT	 107-3069 BALTIC	 107-3068 MARINE	 107-2108 NIGHT	 107-0370 AZURE	 107-5065 PETROL	 107-4042 TITAN
 107-2107 SKYLIGHT	 107-2106 CORAL	 107-2008 EVEREST	 107-5032 CLOUD	 107-4020 SILVER	 107-4045 PERLE	 107-4052 LICHTGRAU	 107-4043 PLATIN	 107-4003 GRAPHITE	 107-9035 SCHWARZ	 107-7001 AMETHYST
 107-2002 BERRY	 107-2021 PINK	 107-2114 ROSÉ	 107-2113 LOTUS	 107-2112 TOMATO	 107-2075 ROT	 107-2074 KIRSCH	 107-2062 PORT	 107-2001 MERLOT	 107-0020 MOCCA	

Colour Marked with  has **PERMABLOK³ PLUS+** ADVANCED PROTECTION protective finish.

CS Also available in BS 5852 Part 2 CRIB 5 quality
BI Also available in DIN 4102 B1 & NF P 92-503 M1 quality

(article code 238-XXXX)
 (article code VB1-XXXX)

Technical data sheet

Composition:	Topcoat: Vinyl
Backing:	Backing 100% Polyester Hi-Loft ² ™
Weight:	650 gr/m ²
Width:	min. 137cm
Roll size:	+/- 30m*
Abrasion:	> 300.000 cycles (MARTINDALE)
Cold Crack:	-23°C
UV-Resistance:	ISO 105 B02: ≥ 7/8 (Blue Wool Scale)

* Typical roll length. Length may vary depending on the availability of standard roll size

Flame Retardancy**:	EU	EN 1021 Part 1 & 2	FR	NF P 92-503 / M2
	DE	DIN 4102 B2	EU	EN 71-2:2006+ A 1: 2007
	EU	ECE R 118.02 Anx. 6,7 & 8		Safety of Toys -part 2.
	EU	IMO 2010 FTP Part 8	US	FMVSS 302
	IT	UNI 9175 Classe 1.1 M		
	IT	UNE 23.727-90 IR/M.2		

Other characteristics	EU (MED) Marine Equipment Directive
	UK UKCA

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behaviour of this or any other material under actual conditions.

FINISHES AND TREATMENTS **PERMABLOK³**[®] ADVANCED PROTECTION Except VALENCIA™ Pure White 107-9607 that has **PERMABLOK³**[®] **PLUS+** ADVANCED PROTECTION

Virucidal Activity:	ISO 18184:2019
	ISO 21702:2019
Bacteriostatic Properties:	ISO 22196:2011
	Value of antibacterial*** activity R>2.

*** Testing was conducted with material exposed to Staphylococcus aureus, Staphylococcus aureus (MRSA), Escherichia coli and Klebsiella pneumoniae.


WARRANTY 5 Years. Terms and Conditions apply.

PERMABLOK³® and SPRADLING®, are registered trademarks of Spradling Holdings, Inc.®.



SUSTAINABLE PRODUCT PROFILE

Heavy Metals Free



*In accordance with REACH, RoHs and ECHA regulations

- AZO = Azo dyes
- CFC = Chlorofluorocarbons
- HCFC = Hydrochlorofluorocarbons
- BPA = Bisphenol A
- PBTs = Persistent Bio accumulative and Toxic Chemicals
- PCP = Pentachlorophenol
- PCB = Pentachlorinated Biphenyl
- PCT = Polychlorinated Terphenyls

Certifications



Sustainable manufacturing certifications



Compliances



MAGLIA


Indoor - Outdoor




MAGLIA 15001 MAG
UYUNI



GLOBE 2378
SUGAR



GLOBE 2431
SHELL




GLOBE 2380
TUSK



GLOBE 2381
PUTTY



MAGLIA 12000 MAG
PRIMROSE



MAGLIA 14537 MAG
TRUFFLE




GLOBE 2427
ORCHARD



GLOBE 2398
IGUANA



GLOBE 2399
HEDGE

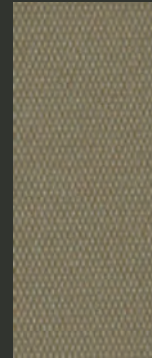

GLOBE 2429
WOODBINE




GLOBE 2430
SASSY



MAGLIA 10406 MAG
SAGE




GLOBE 2434
MAUVE




GLOBE 2387
RED PEPPER



14203 MAG
BLOSSUM



GLOBE 2392
HEMP

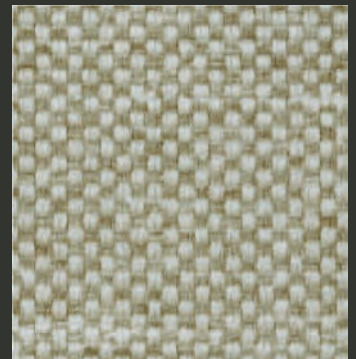

MAGLIA 16025 MAG
GINGER



GLOBE 2383
AUTUMN




GLOBE 2388
CASHEW




GLOBE 2422
MERLOT




MAGLIA 14227 MAG
MARS




GLOBE 2397
EBONY



14008 MAG
ALASKA



GLOBE 2389
NUBIAN



MAGLIA 16016 MAG
THUNDER

MAGLIA

Indoor - Outdoor



MAGLIA 16443 MAG
GREENLAND



GLOBE 2423
PETROL



GLOBE 2425
CELESTE



GLOBE 2428
SKYWAY



MAGLIA 10003 MAG
BREEZE



GLOBE 2379
QUICKSILVER



GLOBE 2390
POOL



MAGLIA 12003 MAG
SKY



GLOBE 2424
SHETLAND




MAGLIA 18022 MAG
SAFARI




GLOBE 2426
ADMIRAL




MAGLIA 15559 MAG
INDIGO

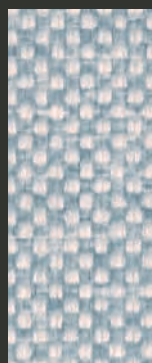

12420 MAG
SERENITY




MAGLIA 18056 MAG
URBAN




MAGLIA 10031 MAG
ARMORY




MAGLIA 11702 MAG
DOVETAIL

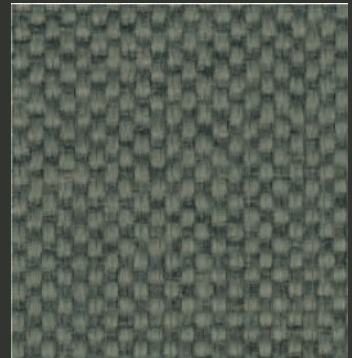

MAGLIA 13616 MAG
EARTH




GLOBE 2385
CLIFF




GLOBE 2393
IRON



MAGLIA 17026 MAG
GRANITE



GLOBE 2421
CARBON

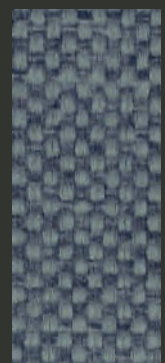

15450 MAG
MIDNIGHT

NEW COLOURS
MAGLIA | GLOBE

INDOOR - OUTDOOR




2457 GLOBE
PENNY



16018 MAGLIA
OAK




2459 GLOBE
TERRAIN

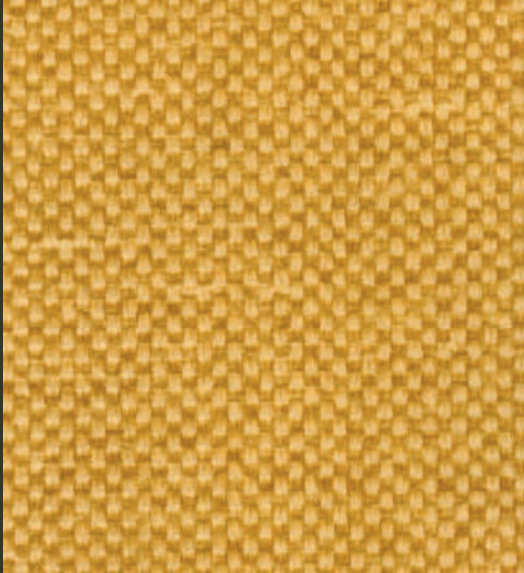


16029 MAGLIA
HIVE




16019 MAGLIA
GRIZZLY




2456 GLOBE
PALE SMOKE




2455 GLOBE
PATH

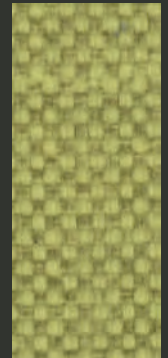


16020 MAGLIA
MAUI



2454 GLOBE
CONCRETE




16031 MAGLIA
ASH

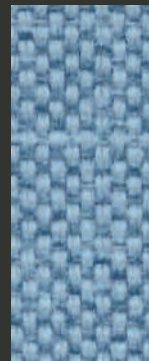

16023 MAGLIA
KYANITE



16017 MAGLIA
ARCTIC



2458 GLOBE
BROOK




16021 MAGLIA
FJORD




16022 MAGLIA
SVALBARD




16030 MAGLIA
ACAI



16027 MAGLIA
TAHOE




16026 MAGLIA
MAPLE

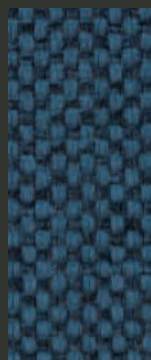

16028 MAGLIA
MINUIT




16032 MAGLIA
BLACKCAVE

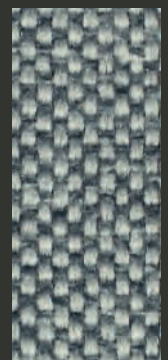

16024 MAGLIA
MONOCHROME



2460 GLOBE
OCTOPUS

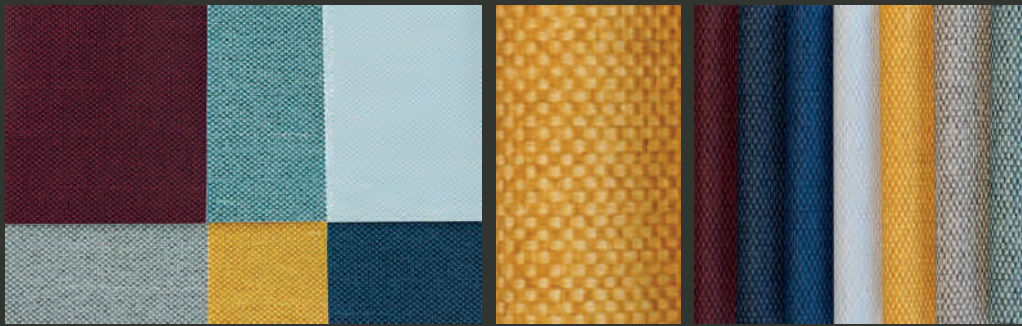

CHARACTERISTICS INDOOR - OUTDOOR

Composition:	Topcoat :Vinyl
Backing:	100% Polyester Hi-Loft ² ™
Weight:	680 gr/m ²
Roll Width:	min. 137 cm
Roll Length:	+/- 30 m
Abrasion:	>100.000 cycles (MARTINDALE)
Cold Crack:	-29 °C
UV-Resistance:	ISO 105 B02: ≥ 7/8 (Blue Wool Scale) ISO 104 B04: ≥ 4/5 (Grey Scale)
Flame retardancy*:	EU EN 1021 Part 1 & 2 EU ECE R 118.02 Anx. 6,7 & 8 EU (MED) Marine Equipment Directive EU IMO 2010 FTP Part 8 EU EN 71-2:2006+A1:2007 Safety of Toys - part 2 DE DIN 4102 B2 IT UNI 9175 Classe 1.1M ES NE 23.727-90 1R/M.2 FR NF P 92-503 (M2) AT ÖNORM B 3825, Gruppe 1 AT ÖNORM A 3800 Teil 1 US FMVSS302 US CAL TB 117-2013, Sec. E US FAR 25/853

*This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behaviour of this or any other material under actual fire conditions.

FINISHES AND TREATMENTS PERMABLOK³® PHTHALATE FREE

Virucidal Activity:	ISO 18184:2019: ¹ Coated Fabrics treated with PERMABLOK ³ ® are proven to reduce the presence of Coronavirus** by more than 90% within one hour of contact. ISO 21702:2019: ² All the Coated fabrics treated with PERMABLOK ³ ® are capable of reducing the Coronavirus** activity by 99.9% within 24 hours of exposure on the surface.
---------------------	--

Bacteriostatic Properties:	ISO 22196:2011. Value of antibacterial*** activity R>2
----------------------------	--

SUSTAINABILITY	eco ^{sense} ISO 14001 Environmental Management Carbon Neutral REACH RoHS
----------------	--

SAMPLES AND ENQUIRES

samples: samples@vyvafabrics.nl | orders: info@vyvafabrics.nl

CARE AND CLEANING

For optimum care and cleaning please read the following instructions and recommendations.

Disinfectant Use

The following information refers to the performance of PERMABLOK³® products in specific tests, conducted under laboratory conditions. Results may vary under actual conditions:

- Asepticare TB + II • Antifect (in 0.5 % dilution) • Caviwipes XL Packed
- Cleanisept Wipes • Clorox Healthcare Bleach • Germicidal Wipes
- Coverage Plus Germicidal Wipes • Desomed rapid • FD 366
- Hydrogen Peroxide Cleaner Disinfectant Wipes • Instrunet Anionsurf
- Lysol Foaming Disinfectant Cleaner • Microzid • Oxivir TB Wipes
- Oxycide Diluted -3oz/gl in water • PDI Sani-cloth bleach wipes
- Sanicloth AF 3 • Sodium Hypochlorite. Disinfectant. Bletach cleaner. Dilution: 1:10 mix of bleach and water. • Surfanios Premium (in 0,25% dilution) • Surfa'Safe Premium (in 0,25% dilution) • Super Sani-cloth
- Virex II 256 (1:256 Dilution) • Virox 5 Rtu • Wet wipe • Wex Cide 128 (1:128 dilution)

Rinse the area with clean water, then dry with a clean, lint-free cloth after using any disinfectants and cleaners.

Cleaning after Disinfection:

The coated fabric should be cleaned periodically in order to maintain its appearance and prevent build-up of dirt and contaminants. Any stain, spills, or soiling should be cleaned up immediately to prevent the possibility of permanent staining. Use a mixture of 1:1 liquid soap (neutral pH) and water or our approved cleaning products for coated fabrics to remove stains on the surface of the material. Completely remove excess cleaner with a white, clean, damp cloth; and dry the surfaces afterwards. Lacquers, strong cleaners, detergents, xylene-based solutions, acetone, or ketone (MEK) cause immediate damage and contribute to the deterioration of the material. The use of such cleaners is at the owner's risk.

Cleaning methods to remove tougher stains

Step 1: Coffee, juice, red wine, sauces, chocolate, grease, crayon and suntan lotion. Remove excess spill with a damp cloth. Clean with a 1:1 mix of neutral liquid soap and water. Next, rinse with clean water and dry.

Step 2: Make-up Use a straight application of neutral PH soap. Wipe with a clean white cloth or soft brush, rinse with clean water, and dry.

Step 3: Blood, urine, faeces and all other tough stains Use a 1:10 mix of Isopropyl alcohol and water. Rinse thoroughly with clean water and dry.

For cleaning: use a soft white cotton cloth saturated with the recommended cleaning agent and rub the stain in random circles, ten times or more. Pat dry with another soft white cotton cloth and check the results. Do not use steel bristle brushes, abrasive scouring pads or metal, these cause permanent damage to the fabric. Methods 2 & 3 are not recommended for everyday cleaning! After cleaning, rinse the area with clean water, then dry with a clean, lint-free cloth. Failure to remove chemical residue will cause discolouration of the coated fabric surface to manifest itself earlier in the life cycle of the product.




HITCH


Indoor - Outdoor




8999-HIT HITCH PORCELAIN



8994-HIT RAISIN



8998-HIT CERULEAN



8962-HIT ICEBERG



8915-HIT LAVA



8995-HIT CIRUELA



8922-HIT LIMEADE



8963-HIT AVALANCHE



8916-HIT NEUTRA



8901-HIT METEORITE



8965-HIT STARFISH




8912-HIT PUTTY




8953-HIT MAHOGANY



8964-HIT SEASHELL



8903-HIT PLATINUM




8961-HIT ZINC



8920-HIT JAVA



8911-HIT BRILLIANT ORANGE




8990-HIT FRESIA




8909-HIT SUNFLOWER



8991-HIT TANGERINE



8999-HIT PORCELAIN



8960-HIT ALLOY



8913-HIT ZEST



8900-HIT PASTEL



8988-HIT LAKRITZ



8957-HIT LEAD



8918-HIT INDIGO



8914-HIT SAPPHIRE



8904-HIT CARBON

s.
en,

els.
vall



Linetta Silver



Linetta Light Grey




Linetta Slate



Linetta Cream



Linetta Salmon

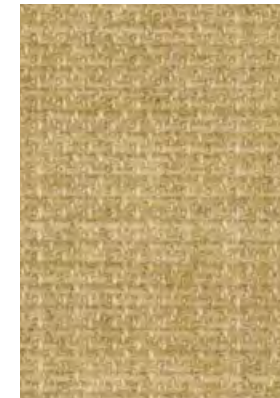

Linetta Olive



Linetta Grape



Linetta Mint




Linetta Light Blue




Linetta Steel



Linetta Nutmeg

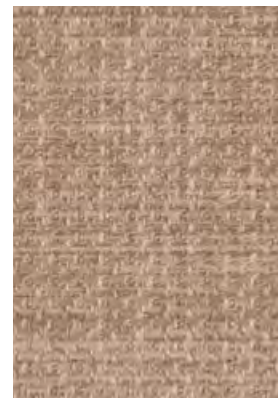

Linetta Sand

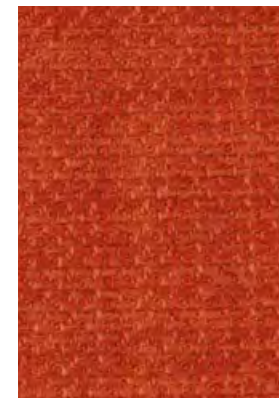

Linetta Burnt Orange




Linetta Lime




Linetta Purple




Linetta Duck Egg

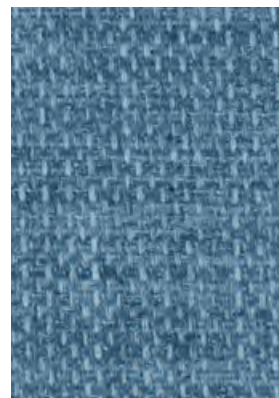

Linetta Denim

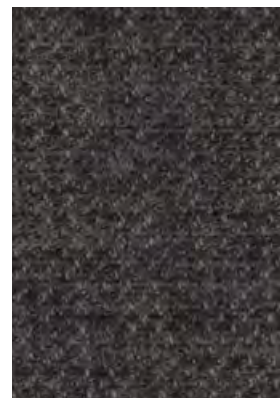

Linetta Charcoal

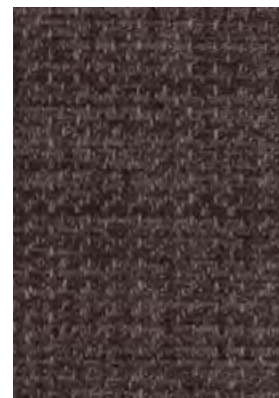

Linetta Truffle



Linetta Gold




Linetta Red




Linetta Orchid




Linetta Damson

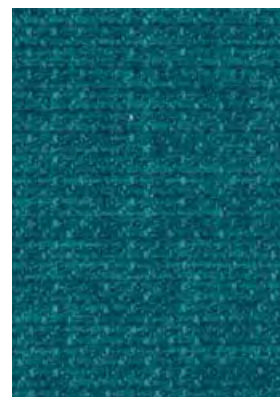


Linetta Teal

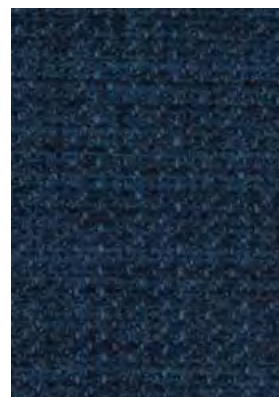

Linetta Midnight

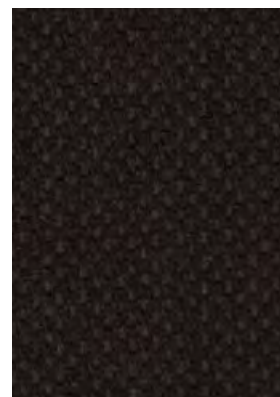

Linetta Black

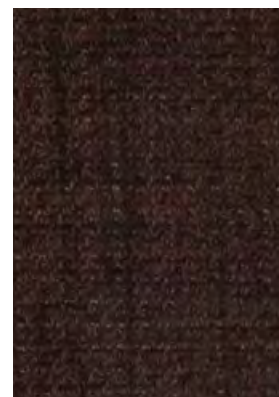

Linetta Chocolate



Linetta Mustard




Linetta Plum



Linetta Violet



Tones Pebble

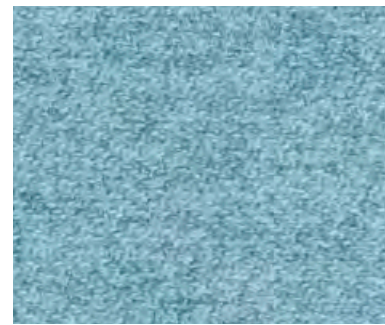

Tones Sky



Tones Silver




Tones Latte



Tones Marine



Tones Pewter

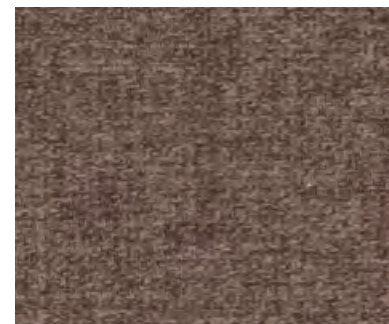

Tones Mink




Tones Petrol



Tones Steel




Tones Truffle

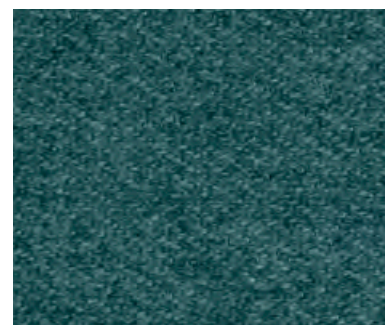


Tones Forest




Tones Lead

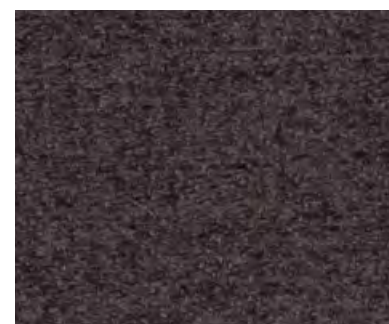

Tones Raven

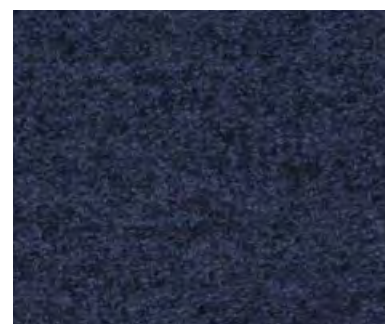

Tones Sapphire

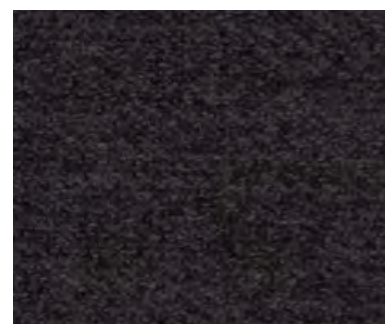


Tones Graphite



Tones Gold



Tones Old Rose

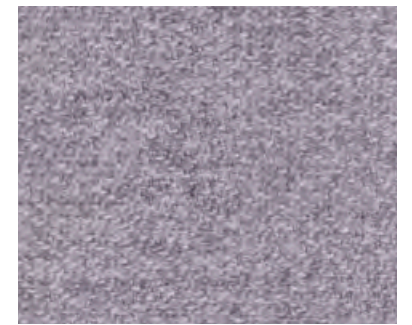


Tones Pearl




Tones Mustard



Tones Orchid

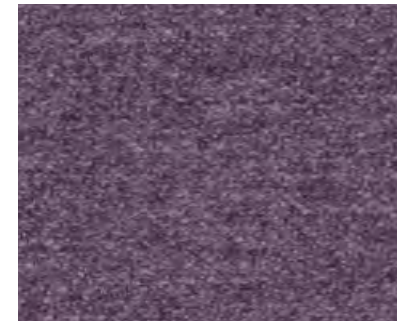

Tones Lilac

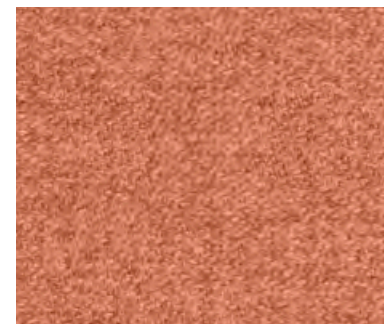

Tones Terracotta




Tones Wine




Tones Thistle




Tones Brick

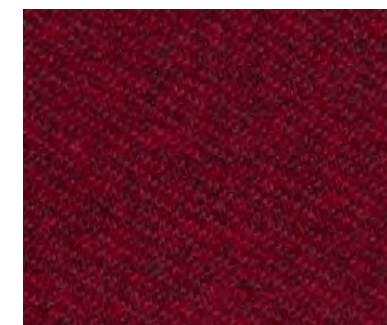

Tones Claret

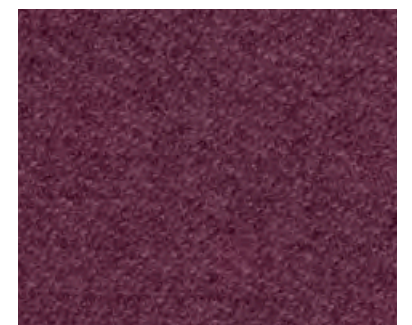


Tones Aubergine

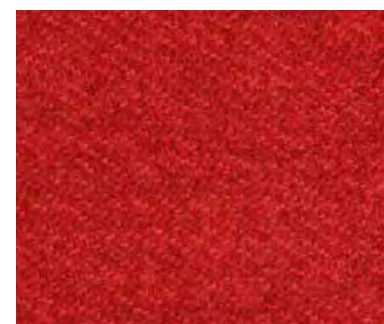


Tones Tomato




Tones Cherry

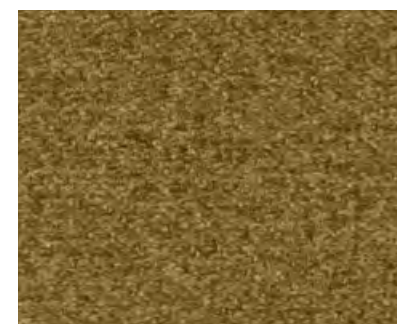


Tones Olive

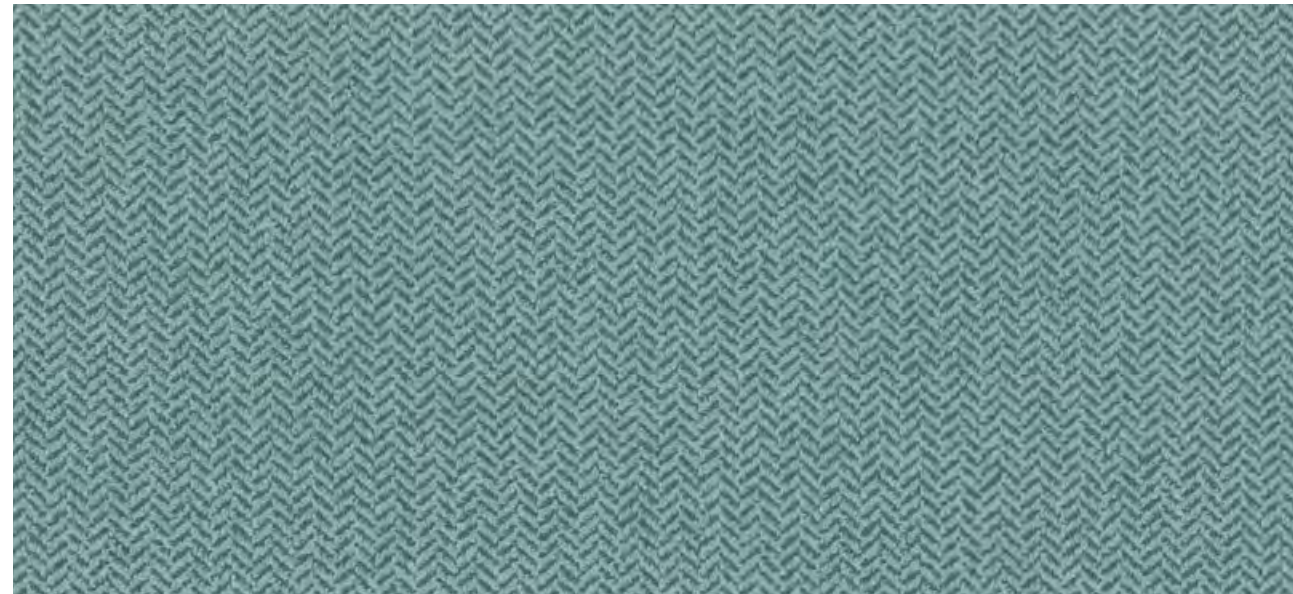

Nova Seagrass



Nova Vanilla



Nova Oatmeal



Nova Mink



Nova Dove



Nova Latte



Nova Walnut




Nova Raven



Nova Taupe



Nova Chestnut



Nova Ebony



Nova Nutmeg




Nova Grape



Nova Dill



Nova Lemon



Nova Lavender



Nova Wedgwood



Nova Fennel




Nova Saffron



Nova Burgundy



Nova Orion




Nova Sage



Nova Burnt Orange



Nova Damson



Nova Bluebell



Nova Moss



Nova Russet




Nova Claret



Nova Royal



Nova Lime



Nova Poppy



Nova Raspberry